TA-B5TVAF18TQ

5MP Motorized IP Bullet Camera

KEY FEATURES

- 5MP HD resolution CMOS Sensor
- 4-in-1 HDCVI/HDTVI/AHD/CVBS optional output
- 2.8-12mm Motorized Lens, 4X zoom, Auto Focus
- OSD menu control over coaxial cable (UTC)
- Over 200M long distance real time monitoring
- Ultra low light and high dynamic range
- Day/Night (ICR), AWB, AGC, BLC, DNR, D-WDR
- Lightning protection
- Strong water-proof housing, IP66
- 3pcs Array IR LEDs
- IR distance 60-70m (210ft)

DIMENSIONS

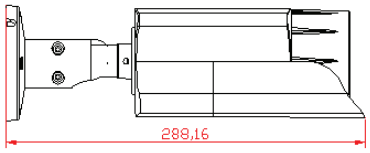

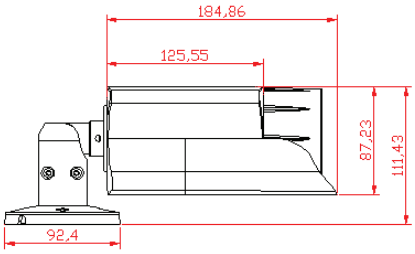

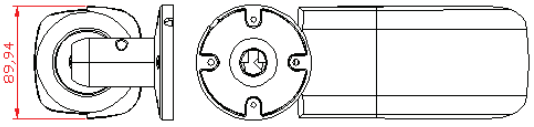

TA-B5TVAF18TQ		
Camera	**Image Sensor**	1/2.7” 5MP CMOS Sensor
	Resolution	2688(H) x 1944(V)
	Signal System	PAL / NTSC
	Lens	2.8-12mm Motorized Varifocal Lens
	Day & Night	Auto(ICR) / Color / B/W
	Min. Illumination	0.01Lux@(F1.2,AGC ON), 0 Lux with IR
	S/N Ratio	More than 50dB
	Synchronous System	Internal
	Video Frame Rate	5MP:HDTVI/AHD:20fps@2560x1440P, 4MP:HDTVI/AHD/CVI:25/30fps@2560x1440P, CVBS:25/30fps@960H
	Video Output	HDTVI/AHD/HDCVI/CVBS optional
	White Balance	ATW / MWB
	BLC	Support
	Electronic Shutter	Auto 1/50s ~ 1/60,000s
	LED	3pcs Array IR LEDs
	IR Distance	60 – 70m (210ft)
	IR Power ON	Smart AUTO Control
General	**Power Supply**	DC12V ± 10%
	Weather Proof	IP66
	Dimension	288 x 87 x 89 mm (11.3” x 3.4” x 3.5”)
	Weight	1.2kg (2.65lbs)
	Operating Conditions	-30°C to 60°C (-22°F to 140°F) / Less than 95%RH